
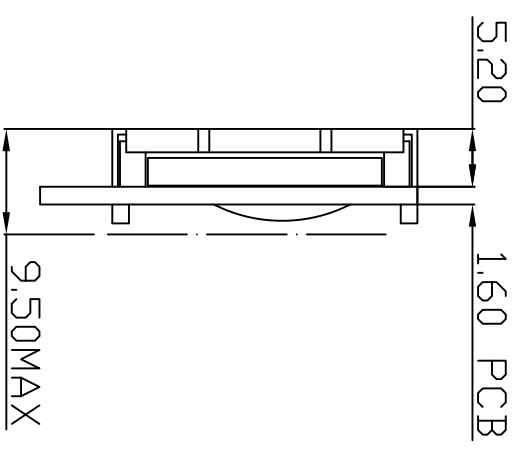


REV	DATE	DESCRIPTION	DESIGNED	CHECK	APPROVED

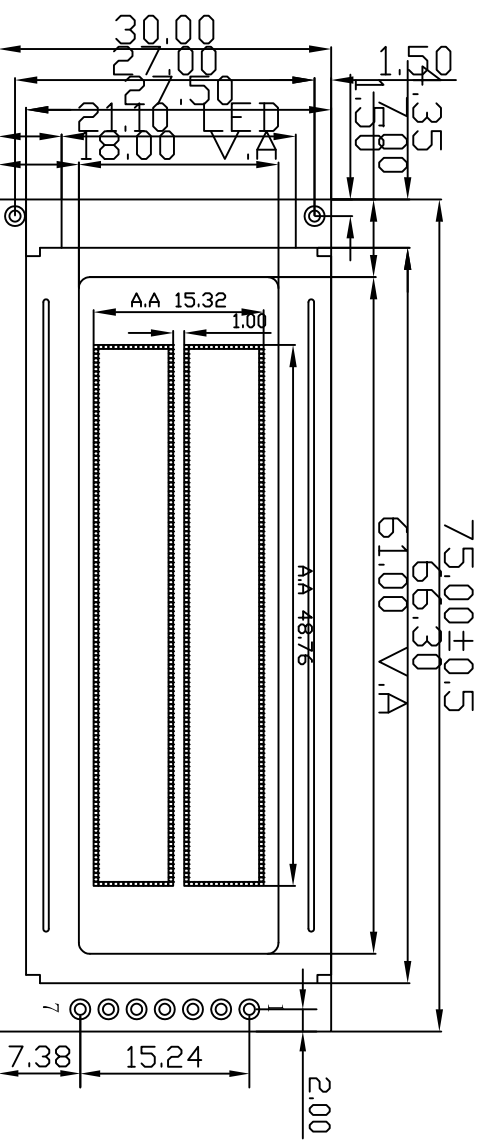

PIN NO.	1	2	3	4	5	6	7
SYMBOL	VSS	VDD	CS	SID	SCLK	LED-	LED+

NOTE:

1. DISPLAY MODE: STN/Y-G/POSITIVE/TRANSFLECTIVE
2. VIEWING DIRECTION: 6:00
3. OPERATION TEMP: -20° C - +70° C
4. STORAGE TEMP: -30° C - +80° C
5. DRIVE METHOD: 1/32DUTY, 1/6BIAS
6. CONTROLLER: ST7920-0B(简体中文字库)
7. VDD=5.0V, ILED=30mA (@VLED=5.0V), COLOR: Y-G

